



GAMMON TECHNICAL PRODUCTS, INC.
P.O. BOX 400 - 2300 HWY 34
MANASQUAN, N.J. 08736

PHONE 732-223-4600
FAX 732-223-5778
EMAIL gammontech@gammontech.com
WEB Site www.gammontech.com

**NOZZLE
ACCESSORIES**

**Bulletin 135
(3-14)**

NOZZLE ACCESSORIES



The **ONLY** nose seal approved by
Meggitt (Whittaker)

Nose Insert Repair - Meggitt (Whittaker) Nozzle Body Reinforcement

Don't replace Meggitt (Whittaker) nozzle bodies if the "lip" at the nose seal becomes cracked. The GTP-1128 repair makes your damaged body better than new. Our design is proven by 20 years of use, and Meggitt (Whittaker) has now adopted and approved our design.

The Gammon Nose Insert design is available from Meggitt (Whittaker) directly on new nozzles as the "X" option.



D-Ring: Fits F116 or F117 nozzle.
Low priced 1/2" thick solid stainless steel
carry handle and interlock bar.
Order GTP-9123



Protected Nozzle Gauge
Liquid filled nozzle pressure gauge with heavy
duty stainless steel mount and guard. Includes
urethane protective bumper.
Order GTP-9069


WING PROTECTOR MAT

Open mesh allows wind to blow through, won't blow away like other mats. Constructed of tough fiber, coated with fuel resistant green plastic.

26" wide
GTP-1103

36" wide
GTP-1104

Each piece is 1yd long.

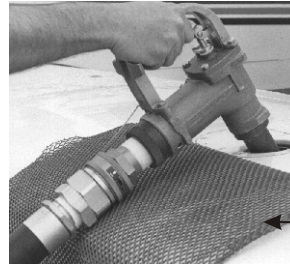


Wing Protector Mat

NOZZLE HOLDERS AND INTERLOCKS SPECIAL DESIGN

Will not damage nose seals.

EASY MOUNTING: Can be mounted in any convenient position using the steel angle bracket.

POSITIVE, RELIABLE INTERLOCKING: When the nozzle is attached to the adapter on the interlock assembly, a pneumatic valve or electric switch is activated to release the vehicle brakes. When the nozzle is removed for fueling operations, the vehicle brakes lock automatically.

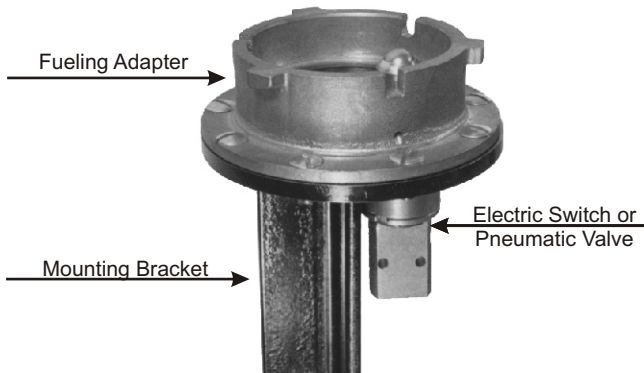

PNEUMATIC INTERLOCKS:

JM-1970-1 3-WAY VALVE N/O
JM-1970-2 2-WAY VALVE N/O
JM-1970-3 3-WAY VALVE N/C
JM-1970-4 2-WAY VALVE N/C

ELECTRIC INTERLOCK:

JM-3505

3-Lug flange without valve or Switch. **GTP-8845-1**

PRODUCT SELECTION SPOUT ADAPTERS

We offer the following adapters to allow you to mount the OPW 696J Jet spout to a variety of nozzles. Without an adapter, the spout will only fit an OPW 295SA-0138 1 1/2" x 1 1/2" nozzle.


NOTE: When ordering the OPW 696J spout, be sure to specify the 153J strainer because no other strainer will fit this spout. For a nozzle including the complete jet spout and strainer order the OPW 295SAJ-0200.

TO FIT:

OPW 1" and 1 1/4" 295
EBW 1 1/4" 495
1" OPW spout to 1 1/2" OPW Nozzle

USE:

GTP-5828-1
GTP-5839-1
GTP-5957

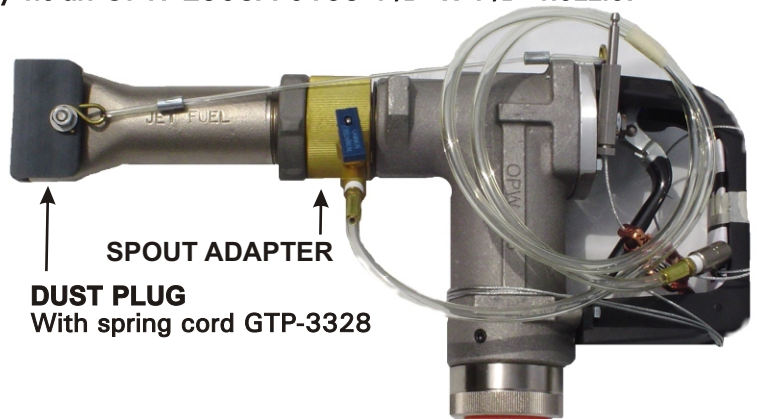

HOSE SWIVELS FOR OVERWING NOZZLES

These swivels turn so easily and are so reliable that no other brand can match them. We guarantee you will be satisfied - money back. Female thread at inlet, male thread at outlet. Anodized aluminum, Buna N seals.

GTP-2969 3/4" NPT
GTP-1501 1" NPT
GTP-1502 1 1/4" NPT
GTP-1503 1 1/2" NPT
GTP-1504 2" NPT



FOR ADDITIONAL LITERATURE ON NOZZLE ACCESSORIES SEE THE FOLLOWING:

Jet Test QD Bulletin 14
Dry Break QD Bulletin 31

Block Out Devices
Nozzle Band Decals

Bulletin 47
Bulletin 74

Wear Gauge for Fueling Adapters Bulletin 156