



GAMMON TECHNICAL PRODUCTS, INC.
P.O. BOX 400 - 2300 HWY 34
MANASQUAN, N.J. 08736

PHONE 732-223-4600
FAX 732-223-5778
EMAIL gammontech@gammontech.com

**Static Bonding
Cable Reel**

**Bulletin 163
(8-11)**

NEXT GENERATION STATIC BONDING CABLE REEL

4-Way Mounting Bracket

- * Small
- * Durable
- * Inexpensive
- * High Capacity
- * Manual Rewind
- * Adjustable Tension
- * Light Weight
- * Rust Free Stainless Brackets

The simplest form of static cable reel is the manual rewind design. This simple reel incorporates all the features you want - and need.

Construction: Static conductive nylon discs
 Aluminum hub with conductive corrosion protection
 Stainless axle, and bracket guide.

1/8" OD cable - over 200'
3/16" OD cable - over 100'


Height: 9 5/8"

Width: 6 3/8"

Depth: 9"

Mounting Plate: 7" x 2"

Weight: (without cable) 5 lbs.

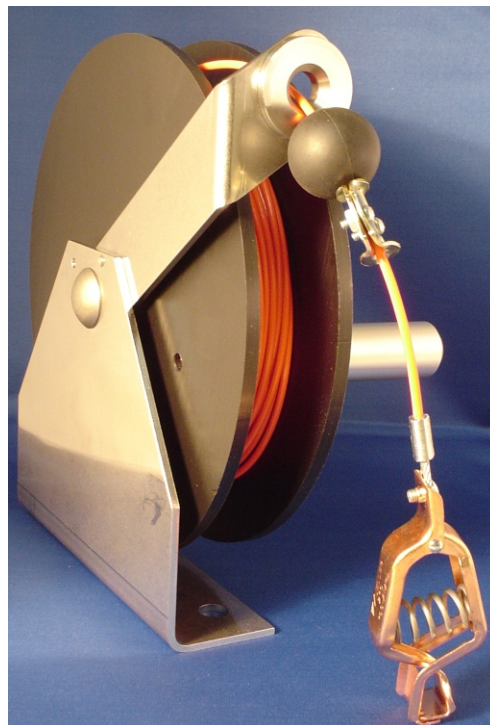

COMBINED CABLE LENGTH NOT TO
EXCEED DRUM CAPACITY (SEE TABLE)

DRUM CAPACITY	
DIA.	LENGTH
1/8"	200'
5/32"	150'
3/16"	100'

RH –Right-Hand
LH – Left-Hand

LENGTH not to
exceed capacity

LENGTH "Y" not
to exceed capacity

GTP-9394 - - (/ - -) -

CABLE COLOR

C – CLEAR PLASTIC (only 1/8" & 3/16" DIA)
D – DAY-GLO RED (only 1/8" & 3/16" DIA)
E – YELLOW HYTREL (only 5/32" DIA)
F – YELLOW VINYL (only 1/8" & 5/32" DIA)
H – HIGH VISIBILITY ORANGE
(only 1/8" & 3/16" DIA)
O – SUPER DUTY ORANGE (only 3/16" DIA)
T – SUPER DUTY CLEAR (only 1/8" DIA)

CABLE DIAMETER

2 – 1/8" DIA
3 – 3/16" DIA
4 – 5/32" DIA

CABLE END

1B - GROUNDING PLUG (Brass GTP-1097B)
1S - GROUNDING PLUG (Stainless Steel GTP-1097S-1)
2 - SUPER CLAMP (GTP-1101)
3 - CLIP (Standard GTP-1096C)
4 - OTHER CLIP (Customer Specify)

CABLE TYPE (SEE BULLETIN 98)

**CABLE END TYPE
(SEE BULLETIN 55)**

EXAMPLE:

GTP-9394 – (65 / 15 – D – 2) – 3,
RIGHT-HAND REEL, LENGTH IS 65 FT.
WITH A 15 FT. Y BRANCH (AS SHOWN)
COLOR IS DAY-GLO RED WITH 1/8" DIA.
CABLE AND GTP-1096C CLIP.

